



1 2 3 4 5 6 7

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

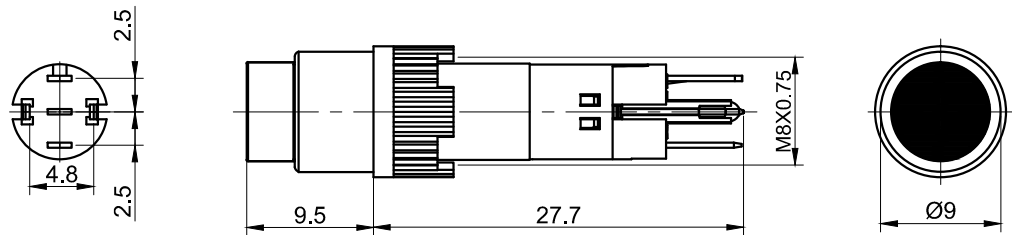


LAS4Y

The shaded part is illuminated

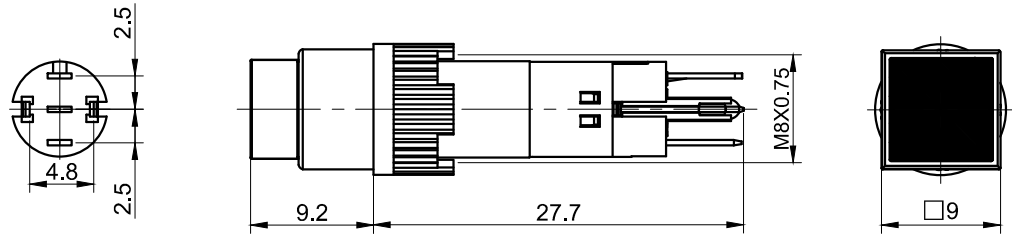

LAS4F

LAS4J

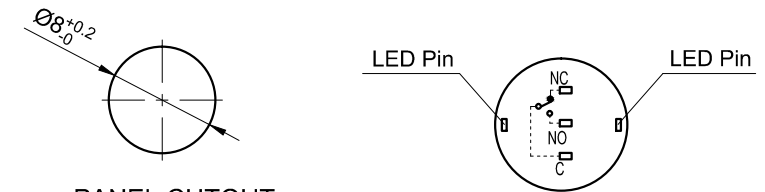

PANEL CUTOUT  
MAX.PANEL THICKNESS  
6 mm

Contact Composition

Part Number: LAS4★-11 ■/△/▲

"★"	Head	"△"	Cap or Lamp Color	"▲"	Lamp Voltage
Y	Round	R	Red	6V	AC/DC 6V
F	Square	G	Green	12V	AC/DC 12V
J	Rectangular	Y	Yellow	24V	AC/DC 24V
		B	Blue	110V	AC/DC 110V (External resistor)
		W	White	220V	AC/DC 220V (External resistor)
		Other voltage can be made to order			

"■"	Operation mode
No Letter	Momentary
Z	Latching

**SPECIFICATIONS:**

- Switch Max Rating: Ith:3A, Ui:220VAC.
- Switch Rating: 220VAC/0.5A, 110VDC/0.1A.
- Mechanical Life: Momentary ≥200,000cycles;  
Latching ≥100,000cycles.
- Electrical Life: ≥50,000cycles.
- Contact Resistance: ≤50mΩ.
- Insulation Resistance: ≥100MΩ.
- Dielectric Strength:  
Between contact and lamp terminals: AC 1,500V, RMS 50Hz, 1min;  
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;  
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- Operating Temperature: -25°C ~ +55°C (No Freezing).
- Operating Force: About 1.4N.
- Operating Travel: About 3mm.
- Terminal Type: Pin Terminal(1.8 x 0.4mm), LED Pin(1.8 x 0.3mm).
- IP Class: IP40.

**MATERIALS:**

- Contact: Silver alloy.
- Button: PC.
- Body: PC.
- Base: PA.

BRAND 品牌	<b>ONPOW</b>	<b>红波按钮制造有限公司</b> ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		USED 用途	APPD 审核	CH	2020/04/29
		FINISH 处理	CHKD 校对	NCH	2020/04/29
		SCALE 比例	UNIT 单位	DR. 制图	ZPD
DIMENSIONS	TOLERANCE	TITLE 名称		LAS4 Series Pushbutton Switches	
0.00 TO 18.00mm	±0.43mm	DWG NO. 图号		SIZE 图纸	
18.01 TO 30.00mm	±0.52mm	LAS4带灯		A4	
30.01 TO 50.00mm	±0.62mm	FILE NAME 档案名称	SHEET 张	1 / 1	REV. 更改
50.01 TO 80.00mm	±0.74mm	LAS4.DWG	1 / 1	1	1

1 2 3 4 5 6 7