


DESCRIPTION	UL2896 - 10N × 210mm * 1.0p * (4/4 , 8/8) * (0,1*0,65) * P7		
KRT PART NO.		DRAWING NO.	

▶ **CABLE TYPE (PATTERN : 7)**

▶ **CABLE DIMENSION [unit : mm]**

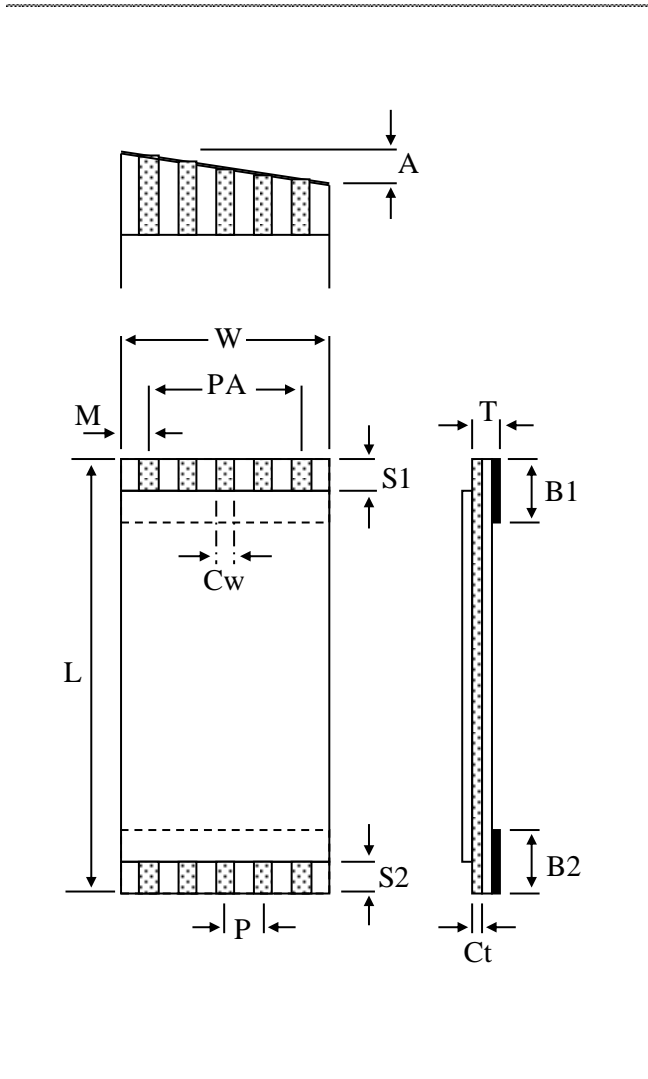

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	1.0	± 0.10
NO. OF CONDUCTOR	N	10	-
CABLE LENGTH	L	210	± 3.00
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	8	± 2.0
	B2	8	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	11.0	± 0.15
SPAN	PA	#ARG!	± 0.15
MARGIN	M	1.0	± 0.15
CONDUCTOR THICK	Ct	0,10	± 0.01
CONDUCTOR WIDTH	Cw	0,65	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	1μm ↑	

⊙ **REMARK**