

■ SPECIFICATIONS


- ⚠ Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 500MΩ min
- Temperature Range : -25°C to +85°C
- Contact Resistance : 10 milliohms Max.

■ TERMINAL

· Part No. : JS-6503-TX

- ① Material:
 - Blank : Phos. Bronze
 - B : Brass

- Applicable Wires : AWG# 22 - 28
- Finish : Tin Plated
- Thickness : 0.2mm
- Q' ty : 7,000 pcs./Reel

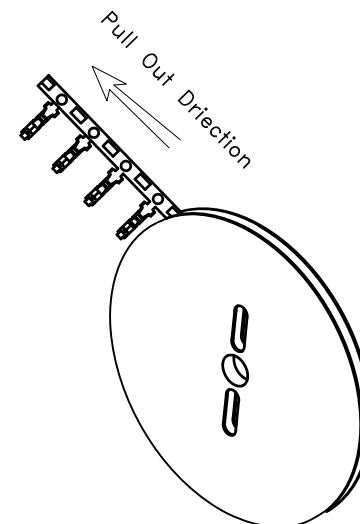

 喬訊電子工業股份有限公司
CHYAO SHIUNN ELECTRONIC INDUSTRIAL LTD.

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	⚠	產品材質變更	林文彬	2006/12/30	⚠			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	⚠	合併圖面&修改料號敘述	王誠賢	2011/07/25	⚠			
周慈雲		a5	.000 ±0.10	⚠	修正產品外觀	吳弘文	2013/09/01	⚠			
DRAWN BY	DATE	SIZE	ANGLE		修正產品外觀	吳弘文	2014/10/24		CUSTOMER		
吳弘文	2015/10/23	A4	0° ±1°	⚠	物性表更新	吳弘文	2015/10/23				
			0° ±	⚠					Conforms to The RoHS Instruction		
			SHEET 1/1	⚠							

PART NO JS-6503-TX
2.50mm Wire to Wire Connector