





A.Material:  
 1.Insulator:High temperature thermoplastic  
 UL94V-0,(BLACK LCP)  
 2.Pho.Bronze:Plating,  
 50U" MIN NICKEL UNDERPLATED;  
 3-8U" GOLD ON THE CONTACT AREA;  
 100U" TIN PLATING ON SOLDER TAIL

B.Electrical specifications:  
 Voltage rating: 10 V AC  
 Current rating: 0.5A  
 Dielectric strength: 500V AC for 1  
 minute min  
 Insulation resistance: 1000 M ohm  
 Contact resistance: 100 mill.ohm max  
 Operation temperature: -25□ to +95□  
 Product withstanding rff low  
 soldering 260□ for 10s

C.Mechanical speicications:  
 3.1 Durability: 5000 cycles

RECOMMENDED PCB PATTERN DIM.  
 TOLERANCE : ±0.05

CUSTOMER DRAWING				一般公差 GENERAL TOLERANCE							
				.X	±0.50	制图 (DR): Kevin 03/26/15		品名 (TITLE): 2.5H 6PIN SIM CARD SMT Conn.			
				.XX	±0.38	审核 (CHKD):		料号 (PART NO): WL-SIM180-103			
				.XXX	±0.25	核准 (APPD):		比例 (SCALE): 10:1	单位 (UNITS): mm	张数 (SHEET): 1 OF 2	图幅 (SIZE): A4
修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE	版本 (REV) A							

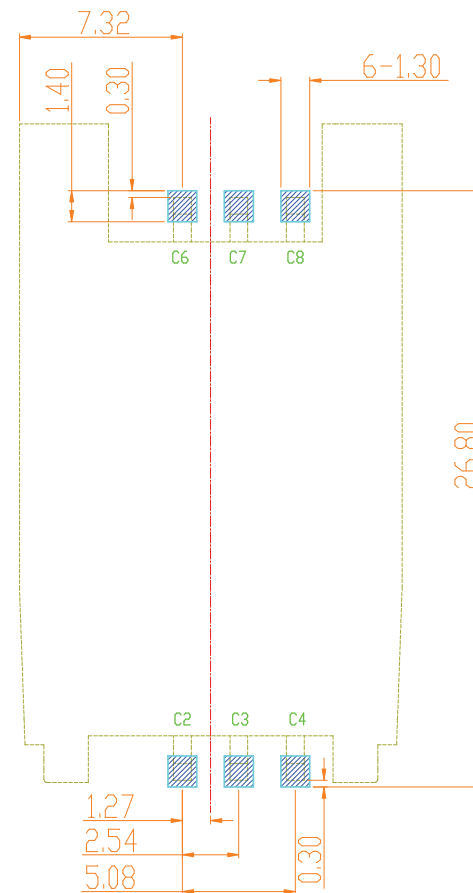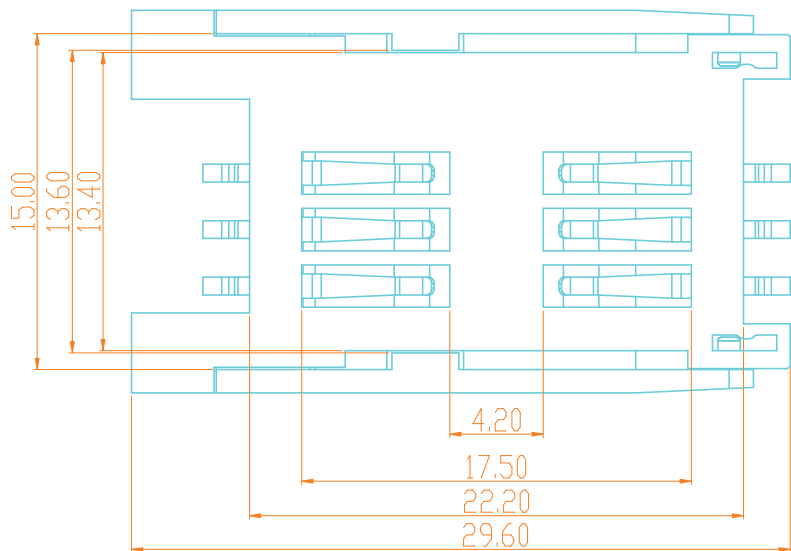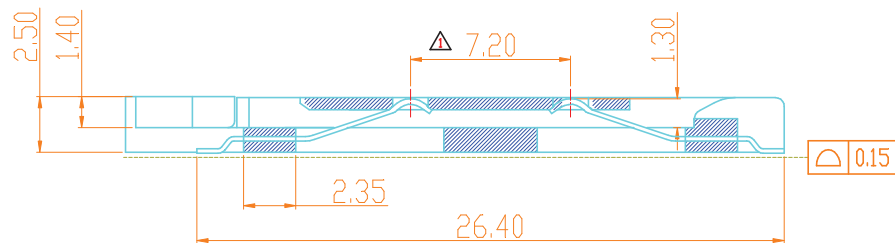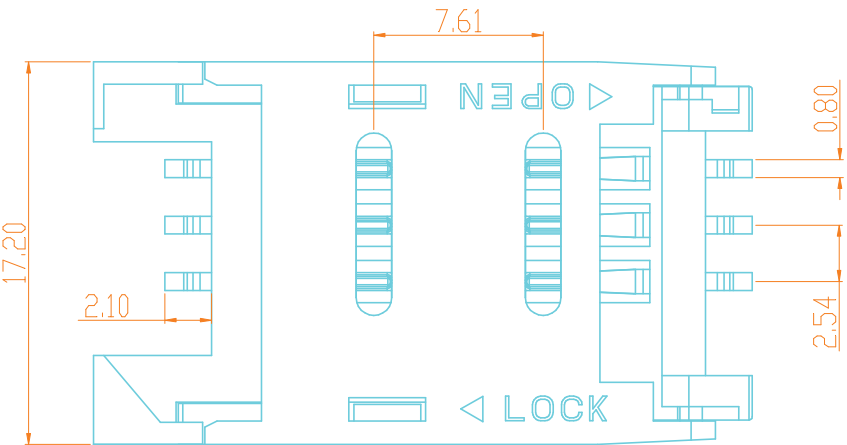

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

A.Material:

- 1.Insulator:High temperature thermoplastic  
UL94V-0,(BLACK LCP)
- 2.Pho.Bronze:Plating,  
50U" MIN NICKEL UNDERPLATED;  
3-8U" GOLD ON THE CONTACT AREA;  
100U" TIN PLATING ON SOLDER TAIL

B.Electrical specifications:

- Voltage rating: 10 V AC
- Current rating: 0.5A
- Dielectric strength: 500V AC for 1 minute min
- Insulation resistance: 1000 M ohm
- Contact resistance: 100 milliohm max
- Operation temperature: -25° to +95°
- Product withstanding rff low soldering 260° for 10s

C.Mechanical specifications:  
3.1 Durability: 5000 cycles

CUSTOMER DRAWING				一般公差 GENERAL TOLERANCE							
				.X	±0.38	制图 (DR):	Kevin	02/26/15	品名(TITLE):	2.5H 6PIN SIM CARD SMT Conn.	
				.XX	±0.25	审核 (CHKD):			料号 (PART NO):	WL-SIM180-103	
				.XXX	±0.15	核准 (APPD):			比例(SCALE)	10:1	
				ANGLES	±2°	单位(UNITS)	mm	张数(SHEET)	1 OF 2	图幅(SIZE)	A4
修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE	版本(REV) A							
		Kevin	2016/08/14								