
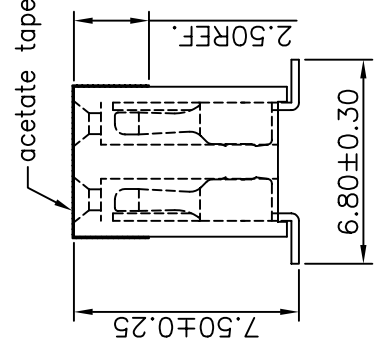
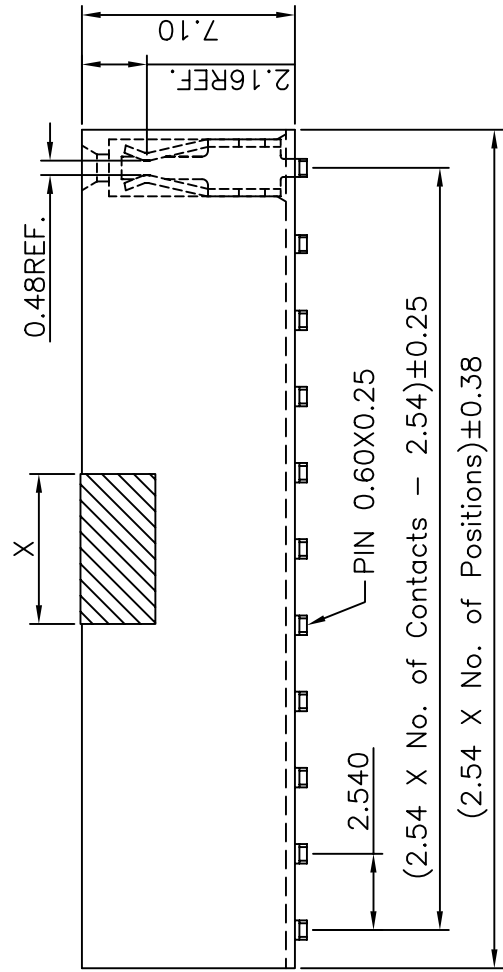



1 2 3 4 5 6 7 8 9

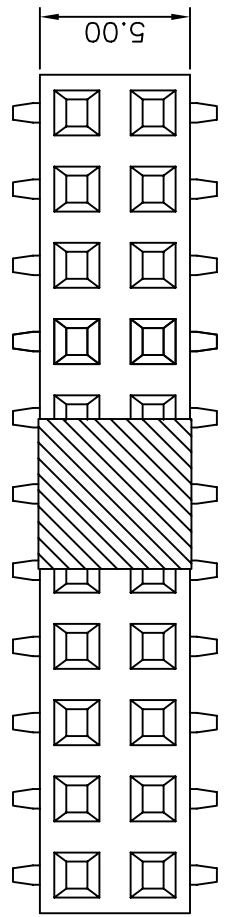

**Specifications**  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T  
 All materials must be GP materials

Recommended P.C.Board  
 Layout

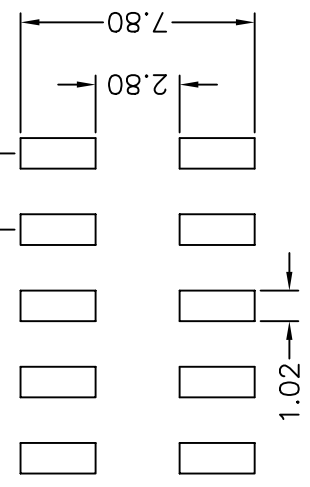

X	NOTE
5.00mm	02~25pins
10.00mm	26~40pins

**Ordering Information**

G SHC221 - XX XX A 01 - X

- No. of Pins per Row  
02-40
- Contact Plating  
01=Fin  
02=Gold Flash Standard  
Duplex Plating  
05=Gold Flash/Tin  
...
- Options  
P=cap  
T=tape reel  
PT=cap+tape reel  
C=acetate tape  
TC=acetate tape+tape reel

格稜股份有限公司  
 Greconn Corporation

REV. 02	UNIT. mm	SCALE. 1:1	PAGE. 1/1
---------	----------	------------	-----------

GENERAL TOLERANCE		DESIGN: 皮洪斌	DATE: 2006.04.14	DWG. NO.
X' ± 5'	X. ± 0.30	CHECKED:		G SHC221-A01
.X' ± 2'	.X ± 0.20	AUDITED:		PART NO.
.XX' ± 1'	.XX ± 0.15	APPROVED:		G SHC221-XX XX A 01 - X
.XXX' ± 0.5'	.XXX ± 0.10			

TITLE:  
 2.54 FEMALE HEADER  
 DUAL ROWS SMT TYPE  
 BASE 7.10H

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
02	皮洪斌	Add the acetate tape specifications	2006.04.14	皮洪斌

1 2 3 4 5 6 7 8 9