

电气性能/Electrical

参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 300V 250V  
 额定电流/Rated current: 10A 18A  
 接触电阻/Contact resistance: 20mΩ  
 使用线径/Wire range: 24-12AWG, 2.5mm<sup>2</sup>  
 耐电压/Withstanding voltage: AC2000V/1Min  
 绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical

温度范围/Temp. Range: -40°C~+105°C  
 扭矩/Torque: 0.4Nm(3.54lb in)  
 剥线长度/Strip length: 6-7mm


尺寸/Dimensions

间距/Pitch: 5.0mm, 7.5mm  
 极数/Poles: 2P-24P

材质及电镀/Material

塑件/Housing: PA66, UL94V-0  
 螺丝/Screws: M2.5, steel Zinc plated  
 方块/Cage: Brass, Ni plated, Steel, Zinc plated  
 焊脚/Pin header: Brass, Tin plated

订购方式:  
HOW TO ORDER

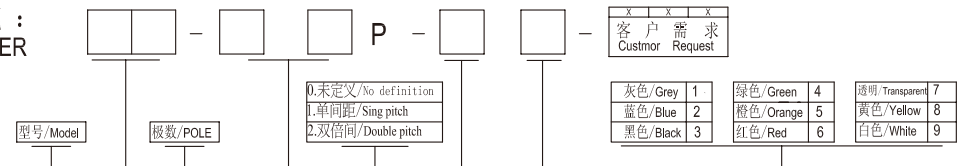

TOLERANCES EXCEPT AS NOTED

		linear dimension(Tolerances Standard GB/T 14486-2008)										≡	—	□	//	⊥
variable range	to	over 6 to	over 10 to	over 18 to	over 30 to	over 50 to	over 80 to	over 120 to	over 160 to	over 200 to	over 250 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
	tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例	第一视角/THIRD ANGLE PROJECTION
						名称/NAME
 CIXI ULO ELECTRONICS CO., LTD 慈溪欧乐电子有限公司						EG128V-5.0 "+