
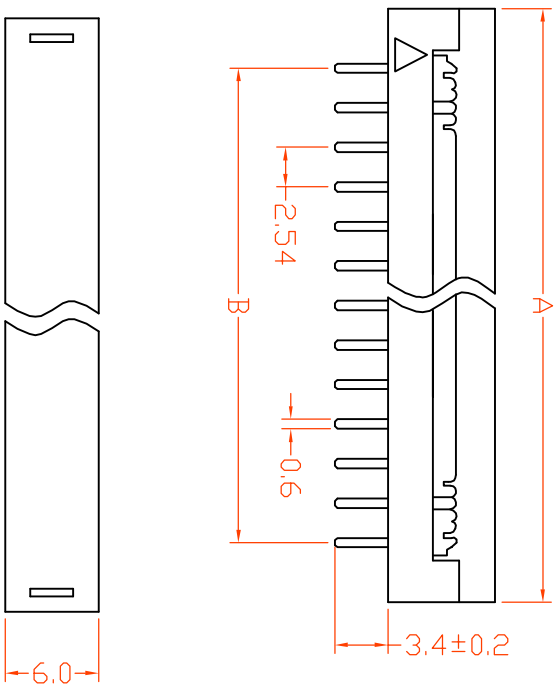


Specifications:
 Contact Resistance: 30mΩ max. at DC 100 mA
 Insulator Resistance: 1000MΩ min. at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55°C---+105°C
 Contact: Phosphor bronze
 Housing: PBT &30% Glass Fiber (UL 94V-0)

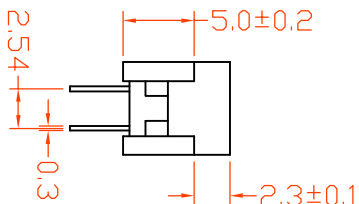

Position	A	B
10	17.80	10.16
14	22.82	15.24
16	25.40	17.78
20	30.52	22.86
26	38.12	30.48
30	43.32	35.56
34	48.40	40.64
40	55.92	48.26
50	68.72	60.96
60	81.42	73.66
64	86.38	78.74

- 要求:
1. 塑料件无裂痕。
 2. 整排针成一直线，相邻针之间相互平行。

设计/Designed by

绘图/Drawng by

审核/checked by

批准/Approved by

未注公差
General Tolerance

图名/Title

文件编号/File No.

X ±0.2
 X ±0.1
 .XX ±0.05
 .XXX ±0.01

123产品图

页序/Sheet

mm