


OPS882

4th Generation Intel® Core™ IPSS/OPS
Digital Signage Player with Intel® QM87,
4K/ 2K

NEW

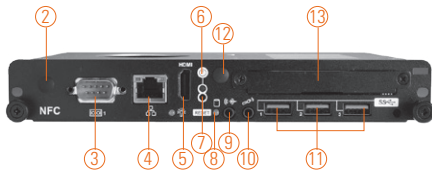

- | | | |
|-----------------|--------------------|------------------------|
| 1. JAE TX-25 | 6. Power Switch | 11. 3 x USB 3.0 |
| 2. Optional NFC | 7. Reset | 12. Optional Antenna |
| 3. RS-232 | 8.HDD indicator | 13. 2.5" SATA HDD tray |
| 4. Ethernet | 9. Audio(Line-out) | |
| 5. HDMI Output | 10. Audio(Mic.-in) | |



Specifications

Main System	CPU	Supports 4th Gen Intel® Core™ i7/ i5/ processors onboard (Haswell Refresh)
	Chipset	Intel® QM87 PCH
	System Memory	1 x 204 pin DDR3L SO-DIMM 1600 max. up to 8 GB
	Storage	1 x 2.5" SATA HDD tray
	BIOS	AMI UEFI BIOS with OA 3.0 built
	Watchdog Timer	255 levels, 1 ~ 255 sec.
I/O	2 x USB 3.0	
	1 x USB 2.0	
	1 x 10/100/1000Mbps Ethernet	
	Intel® i210, supports AVB feature	
	1 x HDMI	
	1 x RS-232 (COM 2)	
	1 x power on/off button	
	1 x reset button	
	1 x Audio (Line-out)	
	1 x Audio (Mic-in)	
	1 x DisplayPort (via OPS JAE interconnector) (Pure DP)	
	2 x USB 2.0 (via OPS JAE interconnector)	
	1 x USB 3.0 (via OPS JAE interconnector)	
	1 x HDMI/DVI (via OPS JAE interconnector)	
	1 x Audio (Line-out, via OPS JAE interconnector)	
	1 x UART (TX/RX, via OPS JAE interconnector) (COM1)	
Indicator	1 x LED for system power ON	
WiFi	Optional 802.11 b/g/n	
Expansion Slot	2 x full-size PCI Express Mini Card 1 x SIM slot	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")	
Packing Dimensions	270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76")	
Weight (net/gross)	1 kg (2.21 lb)/1.5 kg (3.3 lb)	
Environmental	0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)	


Packing

- 1 x driver CD
- 1 x thermal grease
- 2 x M2 x 5 screw
- 2 x M4 x 6 screw

* All specifications and photos are subject to change without notice.
© 2014 Axiomtek Co., Ltd. All rights reserved.

Features

- Open Pluggable Specification (OPS) compliance
- Supports 5th Gen Intel® Core™ i7/ i5 processors (Haswell Refresh)
- Intel® QM87 chipset
- 2 x DD3L SO-DIMM 1600 max. up to 16 GB
- Supports 2 USB 3.0 ports
- 2 PCI Express Mini Card
- Remote management: Intel® AMT (Active Management Technology) 9.0
- HDMI interface for 2nd display
- Supports 4K/ 2K resolution
- Supports TPM 1.2

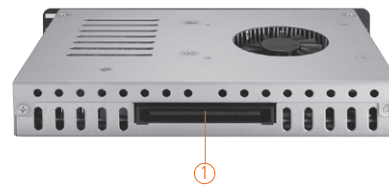


Optional OS Installation

Windows® 7, Windows® Embedded 8

Ordering Information

Standard	
OPS882-i5	OPS digital signage player supports 4th Gen. Intel® Core™ i5 processor onboard (i5-4400E)
OPS882-i7	OPS digital signage player supports 4th Gen. Intel® Core™ i7 processor onboard (i7-4700EQ)
Optional	
OPF320	31.5" full HD digital signage display
OPF321	31.5" LED backlight full HD digital signage display
AX93157	OPS docking board
AX93167	OPS docking board with 4K solution

Dimensions

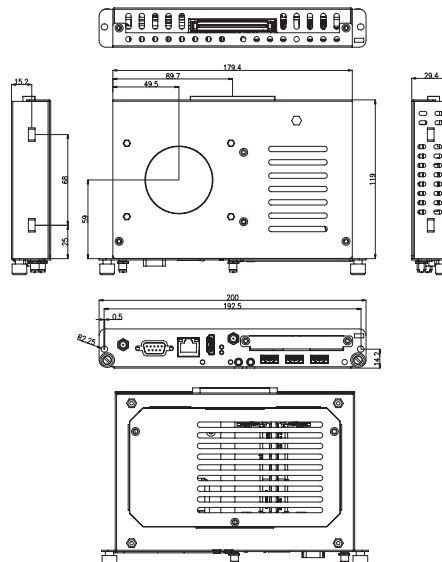

axiomtek.com

Overview

Industrial Panel
Computers &
Monitors

Heavy-duty Fanless
Touch Panel
Computers

Digital
Signage
Solutions

Healthcare
& Medical
Solutions

Open Frame
Panel
Computers

Accessories