


SBC84831

Intel® Atom™ N270 3.5" Embedded SBC with Intel® 945GSE + ICH7M Chipset, VGA/LVDS, DualView, 6 COM and Dual LANs

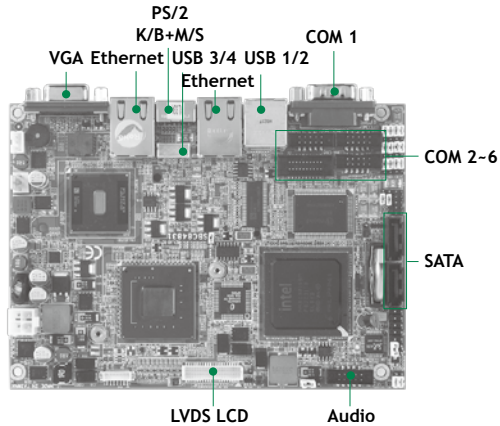

Atom™
Intel® 945GSE
6 COM
LVDS/VGA
4 USB 2.0
AC'97 Audio

Features

- Intel® Atom™ processor N270 1.6 GHz onboard with FSB 533 MHz
- Intel® 945GSE + ICH7M chipset
- With Intel® Gen 3.5 high performance integrated graphics controller for VGA and LVDS
- 4 USB 2.0 ports
- 6 COM ports
- +12V only DC-in supported

System


CPU	Intel® Atom™ processor N270 1.6 GHz onboard with FSB 533 MHz
System Memory	1 x 200-pin SO-DIMM supports DDR2-400/533 max. up to 2 GB
Chipset	Intel® 945GSE + ICH7M
BIOS	AMI
SSD	1 x CompactFlash™ type-II
Watchdog Timer	255 levels, 1-255 sec.
Expansion Interface	N/A
Battery	Lithium 3V/220 mAH
Power Requirements	Intel® Atom™ N270 @1.6 GHz, 1GB DDR2 Max. RMS: +12V @ 1.11A
Size	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	Standard: 0°C - +60°C (32°F - 140°F) Optional: -20°C - +70°C (-4°F - +158°F)
Relative Humidity	10% - 95% relative humidity, non-condensing

I/O


MIO	1 x PS/2 keyboard and mouse 6 x RS-232; with +5V/+12V powered
SATA	2 x SATA-150
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	2 ports as 10/100/1000Mbps support Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111B
Audio	AC'97 Codec audio as MIC-in/Line-in/Line-out/speaker-out with Realtek ALC203
USB	4 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	3 channels IN and 5 channels OUT

Display

Chipset	Intel® GMA 950 graphics Core
Memory Size	Intel® DVM T 3.0 compliant
Display Interface	1 x VGA 1 x LVDS; 18-bit single channel (SBC84831VGGA-N270 w/18-bit LVDS) 1 x LVDS; 18/24-bit single/dual channel (SBC84831VGGA-N270 w/24-bit LVDS)

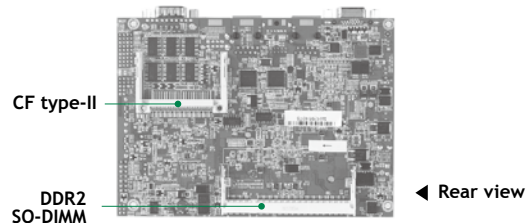

◀ Rear view

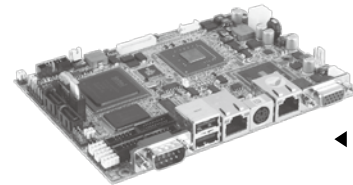

◀ Side view

Packing List

Standard		
Quick installation guide, user's manual/utility CD, cable		
Cable		
Part Number	Description	Qty
593826A0000E	SATA single cable 500mm/red	1
59384500100E	Audio cable w/ bracket P=2,450mm	1
59382631000E	2 x USB 2.0 wafer cable w/ bracket 180mm	1
59384500200E	2 x COM cable w/ bracket P=2.0mm, L=250mm (RC)	1

Ordering Information

Standard	
SBC84831VGGA-N270 w/ 18-bit LVDS (P/N: E384831100)	3.5" SBC with Intel® Atom™ processor N270, VGA, 18-bit LVDS LCD, 2 10/100/1000Mbps Ethernet, audio and CF
SBC84831VGGA-N270 w/ 24-bit LVDS (P/N: E384831101)	3.5" SBC with Intel® Atom™ processor N270, VGA, 24-bit LVDS LCD, 2 10/100/1000Mbps Ethernet, audio and CF
Optional/MOQ	
SBC84831VGGA-N270 w/ 24-bit LVDS & WT (P/N: E384831111)	3.5" SBC with Intel® Atom™ processor N270, VGA, 24-bit LVDS LCD, 2 10/100/1000Mbps Ethernet, audio, CF and W.T. (-20°C - +70°C)
SBC84831VGGA-N270 w/ 18-bit LVDS & WT (P/N: E384831110)	3.5" SBC with Intel® Atom™ processor N270, VGA, 18-bit LVDS LCD, 2 10/100/1000Mbps Ethernet, audio, CF and W.T. (-20°C - +70°C)

* W.T.: Wide Temperature