FILE: 2016-D02\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

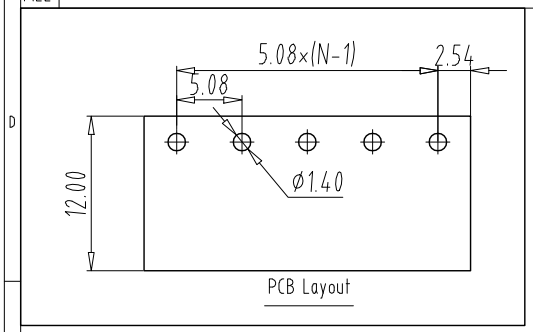

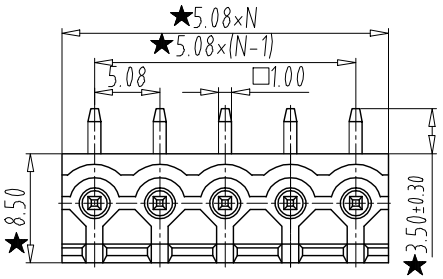

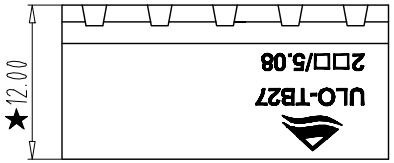



NOTES:

1. Rating: <UL> 300V/16A
   <IEC> 320V/20A
2. Poles:02-24P
3. Insulation Withstands Voltage: AC2000V/1 Min
4. Contact resistance: 20mΩ
5. Insulation Resistance: 500MΩ at DC500V
6. Using Temperature Range: -40°C/+115°C
7. Max soldering : +250° for 5S
8. RoHS Compliance.
9. With" ★ "is import dimension

How to order

ULO-TB27 - 2R /5.08 - XX P -Y 0 0 0A

- ULO-TB27: Certificate Series NO.
- 2R /5.08: Factory Code
- XX P: poles
- -Y: color:
  - 1:Grey
  - 2:Blue
  - 3:Black
  - 4:Green
  - 5:Orange
  - 6:Red
  - 7:transparent
  - 8:Yellow
  - 9:White
- 0 0 0A: Customer requirements

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		≒	—	//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

2	Solder Pin	3140000018/19	4	Brass	Sn Plated	
1	Housing	4030000956	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE	
DWG.		DATE 18.10.17	UNITS	MM	SHEET/OF	1/1
CHK.		DATE	SCALE	1 : 1	A4	
APP.	史文莉	DATE	NAME	ULO-TB27-2R/5.08-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.	ULOTB27Y002A		

TIANLI ELECTRICAL MACHINERY (NINGBO) CO.,LTD.

REV:1.0