
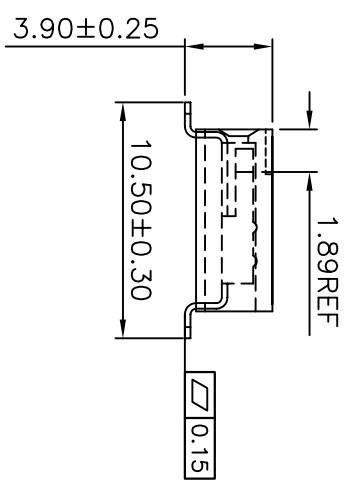
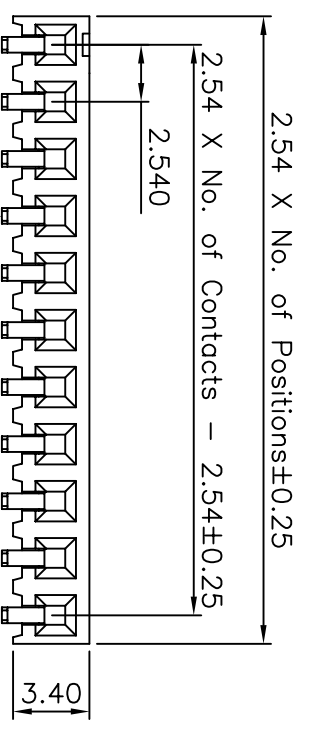


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A		INITIAL RELEASE	2007.07.24	周禮青
B	△	Change Part NO.	2009.04.21	黎廣華

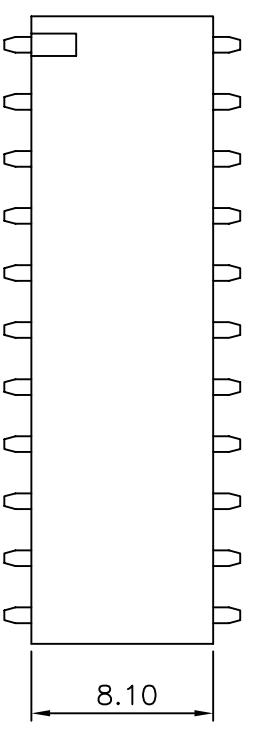


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 LCP

All materials must meet Greenconn requirement for environment protection

Recommended P.C.Board Layout

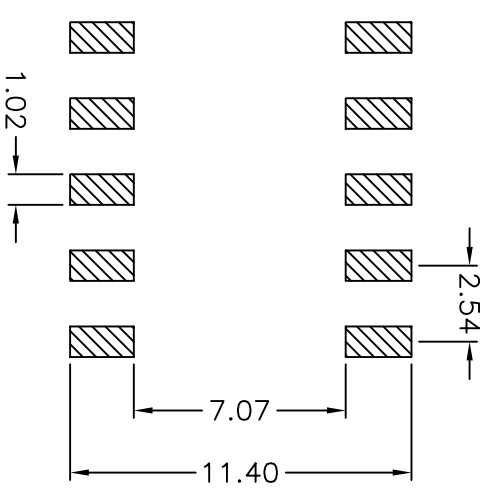

Ordering Information

△C SHC110 - XX XX A 001 C 1 A X

No. of Pins per Row
02-40

Standard Plating
01=Tin
02=Gold Flash
05=Gold Flash/Tin

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=box

格 菱 股 份 有 限 公 司 Greenconn Corporation				GENERAL TOLERANCE		DESIGN: 黎廣華		DWG. NO.		TITLE:	
REV. B	UNIT. mm	SCALE. 3:1	PAGE. 1/1	X. ± 5°	X. ± 0.30	CHECKED: 李新華	DATE: 2009.04.21	CSHC110-A001C1AX		2.54 FEMALE HEADER	
				X. ± 2°	X. ± 0.20	AUDITED: Lear	DATE: 2009.04.21	PART NO. △		SINGLE ROW SMT TYPE	
				.XX ± 1°	.XX ± 0.15	APPROVED: Link	DATE: 2009.04.21	CSHC110-XX XX A001C1AX		SIDE ENTRY	
				.XXX ± 0.5°	.XXX ± 0.10						