







**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

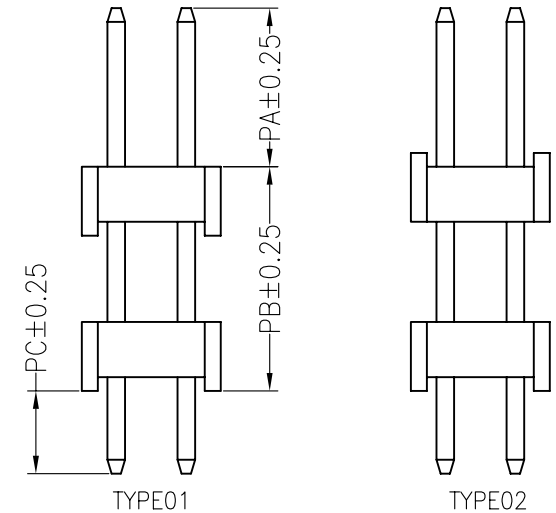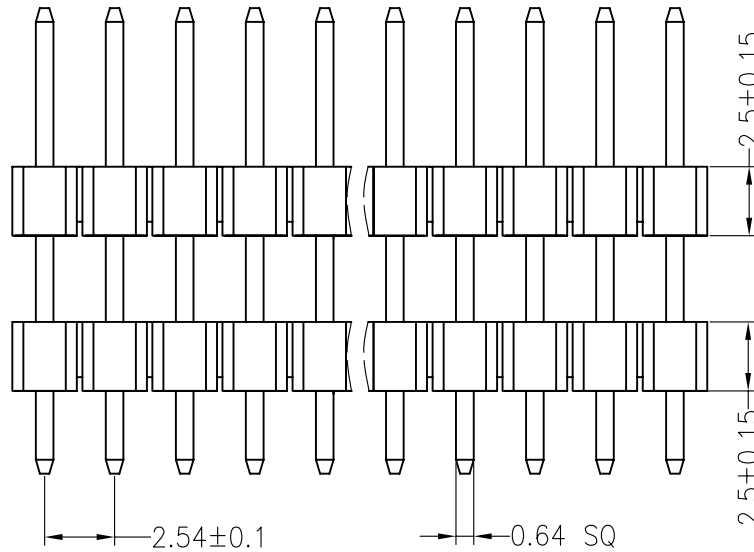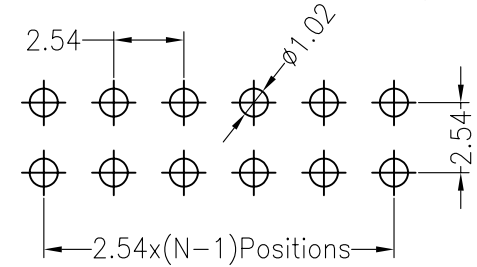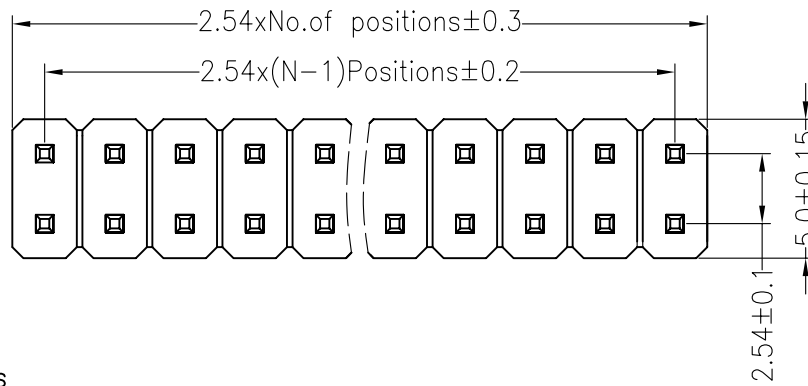

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.0	10.4	3.0	19.4
Alternate				

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	<b>CONNTHERM</b>  PART NO. <b>PLDP04S10</b> TITLE: <b>2.54PH Dual Row Double Plastic 180° H=2.5</b>		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4				
				X.XXX	±0.10	APPROVE		SHEET	1/1				
AO	2012.04.18	NEW DRAWING		Angle	±3°			PROJ.					
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL								