







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

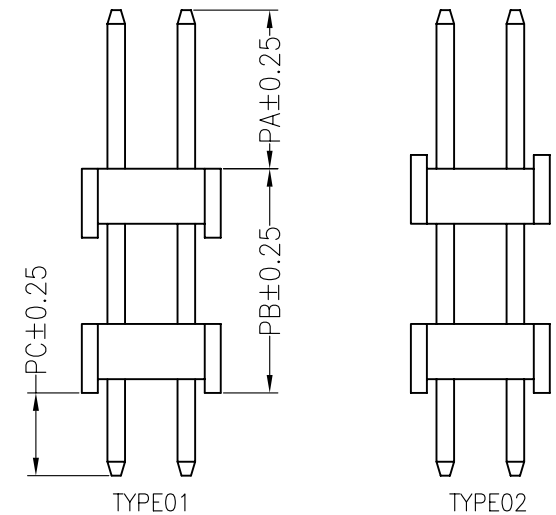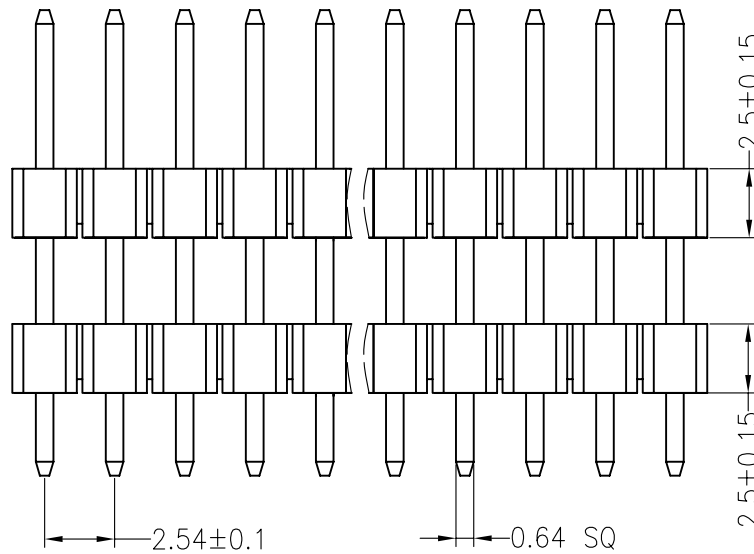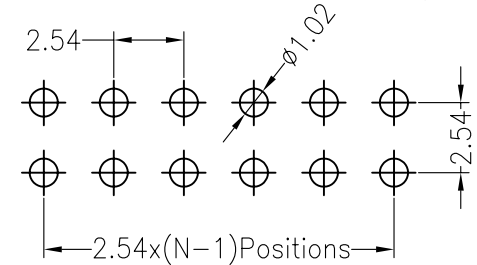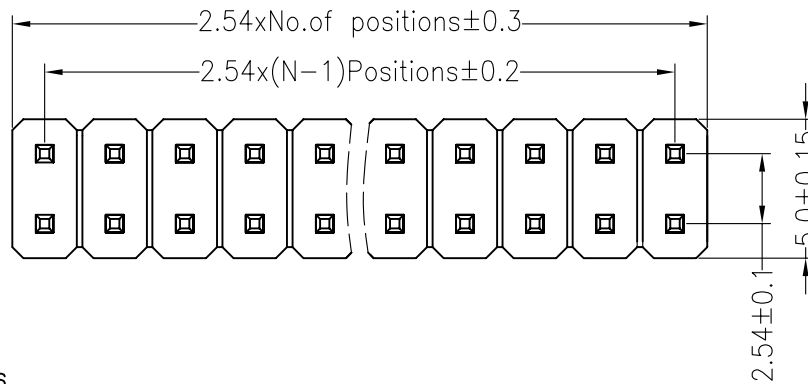

| Dimension antitheses list | | | | |
|---------------------------|-----|------|-----|------|
| ITEM | PA | PB | PC | L |
| Standard | 6.0 | 10.4 | 3.0 | 19.4 |
| Alternate | | | | |

| | | | | | | | | | | | | | |
|-----|------------|--------------------------|--|-----------|-------|---------|-----------|----------|-------|----------|------------------|--|------------------|
| | | | | OPERATION | | DRAW | YiYuSheng | 12.04.18 | SCALE | FIT | CONNTHERM | | |
| | | | | X.X | ±0.30 | | | | UNIT | mm | | | |
| | | | | X.XX | ±0.20 | CHECK | | SIZE | A4 | PART NO. | | | PLDP08S10 |
| A0 | 2012.04.18 | NEW DRAWING | | X.XXX | ±0.10 | APPROVE | | SHEET | 1/1 | TITLE: | | | |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | ANGLE | | | PROJ. | | | | | |