




REV-SA01

3.5 inch SMARC specification compliant

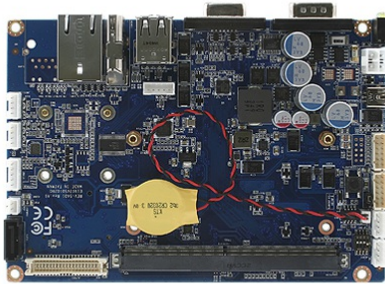

- > 3.5" SBC Form Factor
- > Accept Avalue and Other SMARC Compatible
- > CPU Modules. (82 x 50mm)
- > HDMI, LVDS, VGA
- > Audio Interface
- > 1 x Mini-PCIe + SIM Socket
- > 2 x CAN BUS
- > 2 x Gigabit LAN
- > 4 x RS-232, 3 x USB
- > 1 x SD Socket
- > 1 x SATA
- > 1 x I2C RTC
- > On-board Accelerometer (MMA8451)
- > On-board Battery Charger Support 7.4V/2 Cell Li Battery

+ Spec

I/O	
USB	2 x USB Type A 1 x USB 2.0 (1 x 5 Pitch 2.0mm Header)
MIO	4 x 4 x RS-232 (TX/RX Only)
External I/O Connector	1 x HDMI 1 x VGA 2 x RJ45 1 x DB9 1 x Mini-USB 2 x USB Type A
Internal I/O Connector	1 x LVDS Connector (24-bit Single-channel) 1 x Backlight Connector 1 x SD Socket 1 x USB Connector 2 x CAN BUS Connector 1 x Speaker-out/Mic-in 1 x RS-232 Connector 1 x GPIO Connector 1 x RTC Battery Connector 1 x 2 Cell Li Battery Connector 1 x SATA Connector
Audio	
Chipset	Wolfson WM8962
Audio Interface	Mic-in, Speaker-out
Mechanical & Environmental	
Power Requirement	+9V ~ 36V DC-in (REV-SA01-02-A1R) +9V ~ 24V DC-in (REV-SA01-03-A1R)
Power Type	AT
Operating Temp	0°C ~ 60°C (32°F ~ 140°F)
Storage Temp	-20°C ~ 80°C (-40°F ~ 176°F)
Operating Humidity	0% ~ 90% Relative Humidity, Non-condensing
Dimension (L x W)	146mm x 101mm (3.5" SBC Form Factor)
Weight	0.13kg
Certifications	
Certification Information	CE FCC Class B

+ Ordering

REV-SA01-03-A1R
3.5"SMARC Carrier Board full function A1

REV-SA01-02-A1R
3.5"SMARC Carrier Board (A1)