





**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

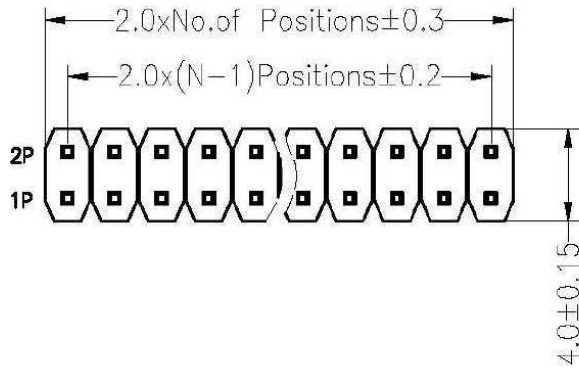

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

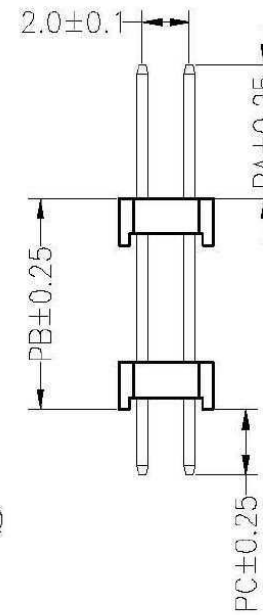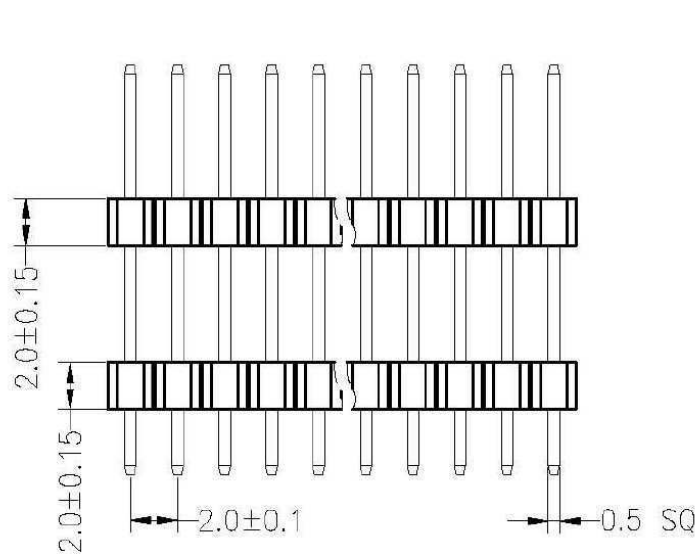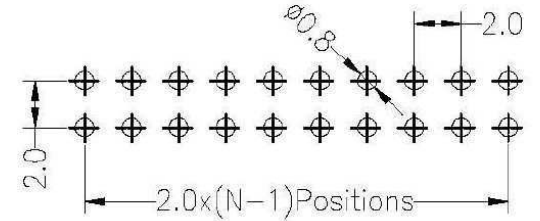

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.0	12.4	3.0	21.4
Alternate				

**CONN THERM**

PART NO.

PLMDP10S21

TITLE:

2.0PH 2xNpin 2\*H2.0mm 180°

OPERATION

DRAW

SCALE

FIT

X.X ±0.30

CHECK

UNIT

mm

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

APPROVE

SIZE

A4

SHEET

1/1

PROJ.



AO

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

1

2

3

4

5

6

7

8

9