


I Direction		Insulation Color	Overall Shield
PIN	Signal		
1	Overall Shield		
2	Y + Receive	BLUE	
3	Y + Receive	BLUE	
4	Y Transmit	BLUE	
5	Y - Receive	BLACK	
6	Y Ground	YELLOW	
7	Shield		
8	X Ground	GREEN	
9	X+Receive	WHITE	
10	X Transmit	RED	
11	X-Receive	RED	
12			


sensor 1	Y-Transmit	
sensor 2	Y-Receive	
sensor 3	X-Receive	
sensor 4	X-Transmit	

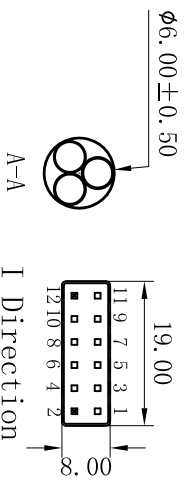

Unmarked Tolerance		
From (mm)	to (mm)	Quality Level
0	10	±0.05
10	50	±0.10
50	100	±0.15
100	200	±0.20

mark		Content of Amendment		Edition		Author		Date	
Design	Drawing			standard	process				

SAW screen specs			
sign	weight	Scale	
		Free	
Total X 1 P X 1 P			



 Dongguan Cintech Electronic co., Ltd.

product
 CTB104C-4F

Drawing No.