


I Direction		
PIN	Signal	Insulation Color Overall Shield
1	Overall Shield	
2		
3	Y + Receive	BLUE
4	Y Transmit	BLUE
5	Y - Receive	BLACK
6	Y Ground	YELLOW
7	Shield	
8	X Ground	GREEN
9	X+Receive	WHITE
10	X Transmit	RED
11	X-Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

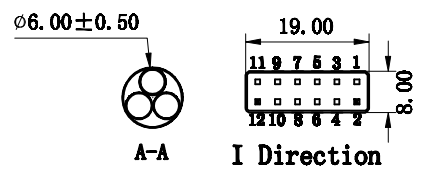

Product Requirement:  
Glue line way: on the bevel edge

Unmarked Tolerance						SAW screen specs			 Dunham Circuit Electronic Co., Inc.		
from (mm)	to (mm)	Quality Level	mark	Content of Amendment	Edition	Author	Date	sign	weight	Scale	product CTB151C-4FS
0	10	±0.05									
10	50	±0.10	Design		standard					Free	
50	100	±0.15	Drawing		process						
100	200	±0.20	Check		Approve						
								Total X 1 P X 1 P			