DATE	07-06-16	SPECIFICATION
PAGE	1/7	SIECIFICATION
MODEL NUMBER:BUZ-EET5020CS-03L-4.0-12-R		

# SPECIFICATION FOR APPROVAL MAGNETIC TRANDUCER

Model Name	BUZZ-EET5020CS-03L-4.0-12-R
Note	RoHS Compliant

Product Photo	
	DRAWING:
	CHECKED:
	APPROVED:

DATE	07-06-16	SPECIFICATION
PAGE	2/7	SIECIFICATION
MODEL NUMBER: BUZ-EET5020CS-03L-4.0-12-R		


## 1.BUZ-EET5020CS-03L-4.0-12-R MAGNETIC BUZZER

No.	Item	Unit	Specification	Condition
1	Oscillation Frequency	Hz	4000	Vo-p=1/2duty , square wave
2	Operating Voltage	Vo-p	2 ~ 4	
3	Rated Voltage	Vo-p	3	
4	Current Consumption	mA	MAX. 110	at Rated Voltage
5	Sound Pressure Level	dB	MIN. 75	at 10cm at Rated Voltage
6	Coil Resistance	Ω	12±2	
7	Operating Temperature	$^{\circ}\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!$	-20 ~ +70	
8	Storage Temperature	$^{\circ}\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!$	-30 ~ +80	
9	Dimension	mm	5.2 x 5.2 x H1.7	See appearance drawing
10	Weight (MAX)	gram	0.6	
11	Housing Material		LCP( Black ) Top(Brass)	
12	Leading Pin		Tin Plated Brass(Sn)	See appearance drawing
13	Environmental Protection Regulation		RoHS	


DATE	07-06-16	SPECIFICATION
PAGE	3/7	SIECIFICATION
MODEL NUMBER:BUZ-EET5020CS-03L-4.0-12-R		

# 2.DIENSIONS (UNIT: mm)

Tolerance:  $\pm 0.5$ mm Except Specified

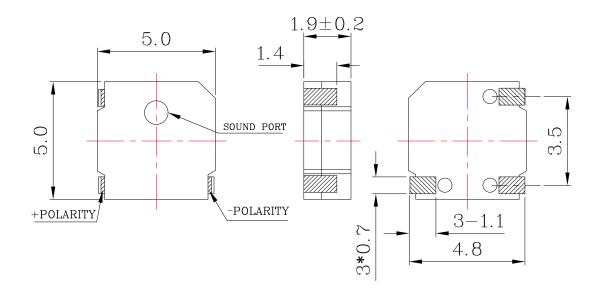

# **3.FREQUENCY RESPONSE:**

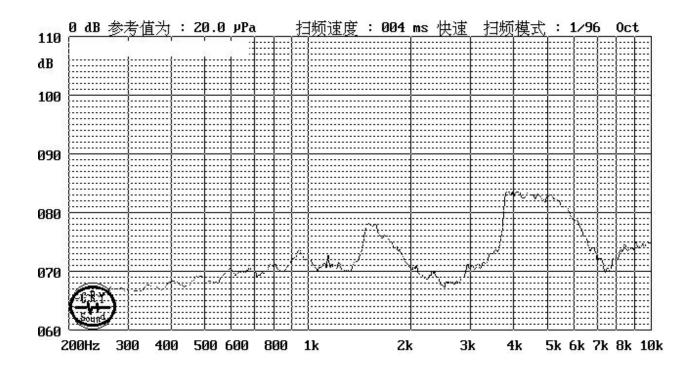

DATE	07-06-16	SPECIFICATION	
PAGE	4/7	SIECHICATION	
MOD	MODEL NUMBER:BUZ-EET5020CS-03L-4.0-12-R		


#### **4.TESTING METHOD**

#### **Standard Measurement conditions**


Temperature:25±2°C Humidity:45-65%

#### **Acoustic Characteristics**

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below

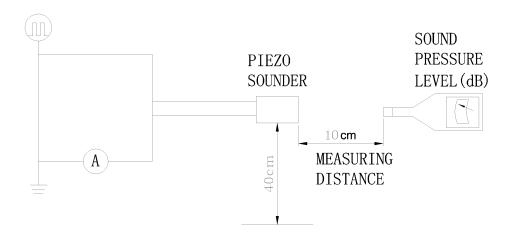


In the measuring test, buzzer is placed as follows:

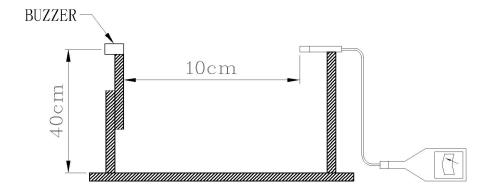

DATE	07-06-16	SPECIFICATION	
PAGE	5/7	SIECIFICATION	
MOD	MODEL NUMBER:BUZ-EET5020CS-03L-4.0-12-R		

### 5. Recommend Driving Circuit

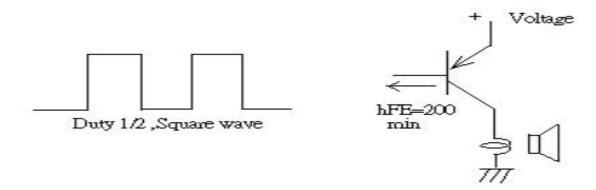


The base current Ib should high enough so that it saturates the collector current of the transistor with the CB load.

#### 6. Soldering Condition

(1)Recommendable reflow soldering condition is as follows (Reflow soldering is twice)

Note:It is requested that reflow soldering should be executed after heat of product goes down to normal.

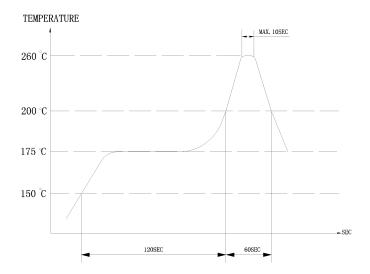

Heat resistant line

(Used when heat resistant reliability test is performed)

(2)Manual solderingManual soldering temperature 350 °C within 5 s

DATE	07-06-16	SPECIFICATION
PAGE	6/7	SIECIFICATION
MODEL NUMBER:BUZ-EET5020CS-03L-4.0-12-R		

## **7.RELIABLY TEST:**

NO.	ITEM	TEST CONDITION AND REQUIREMENT
1	High Temperature Test (Storage)	
2	Low Temperature Test (Storage)	After being Placed in a chamber with -30 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.
4	Temperature Cycle Test	The part shall be subjected to 5 cycles. One cycle shall be consist of:  +70°C  +25°C  -20°C  -20°C
5	Drop Test	Drop on a hard wood board of 4cm thick, any directions ,6 times,at the height of 75cm .Allowable variation of SPL after test: 10dB.
6	Vibration Test	After being applied vibration of amplitude of 1.5mmwith 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours .Allowable variation of SPL after test: 10dB.
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +300 5°C for 3 1 seconds .  90% min. lead terminals shall be wet with solder (Except the edge of terminals).
8	Terminal Strength Pulling Test	The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds.  No visible damage and cutting off.

DATE	07-06-16	SPECIFICATION
PAGE	7/7	SIECIFICATION
MODEL NUMBER:BUZ-EET5020CS-03L-4.0-12-R		

#### **8.PACKING:**

