

Compact Industrial LTE Router

InRouter305

• 4G

· Wi-Fi


Security

· Cloud-Managed

· Rich Industrial Interfaces



The IR305 is an IoT cellular router that integrates 4G LTE, Wi-Fi, and VPN technologies to provide easy, reliable, and secure Internet connectivity. With features such as 4G wireless wide area network and Wi-Fi wireless local area network, it offers uninterrupted access to multiple networks. With comprehensive security and intelligent software services, it enables efficient and secure networking, providing enterprises with safe and reliable data links for digital networking.

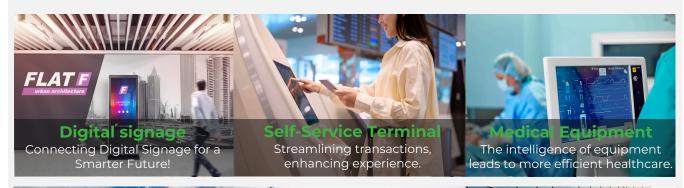





Features and Advantages

Diverse access methods covering all scenarios

IR305 has the capability to access the Internet through cellular, wired, and Wi-Fi connections, catering to different network environments. It provides differentiated cellular network services based on varying business requirements.



• "Always-on" connectivity

The IR305 comes with 4G/wired/Wi-Fi backup, cellular link failover, dual SIM switching, VRRP, multi-layer detection mechanism, and other features, providing a reliable and robust connection to ensure your network stability and reliability.



Secure Network Connection


The IR305 is equipped with firewall policies, access control, built-in VPN, data encryption, enhanced Wi-Fi security, and other features, effectively ensuring the security of the network.




Device Manager-Cloud management

The IR305 connects to the InHand Device Manager remote device management cloud platform to manage tens of thousands of distributed site devices in real time and grasp device status anytime and anywhere, making management more economical and more efficient!









Take control

Real-time monitoring

Critical Status

Dimensions (mm)

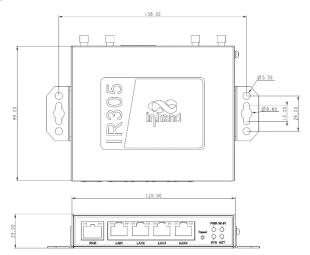



Industr	rial Tern	ninal					
IR305							
СОМ	DIO4	DIO3	D1O2	DIO1	V+	V-	
Ю				Power sup		er supply	
IR305-	s						
GND	TXD	RXD	В	A	V+	V-	
RS232			RS485		Pow	Power supply	

Dimensions: 120*99*25 (mm)



Product Specifications

		ecifications				
Hardware Platform						
CPU	580MHz					
RAM	128M	B DDR2				
FLASH	64MB SPI					
Interfaces						
Ethernet Port	5*10/100Mbps fast Ethernet port, RJ45, WAN/LAN/VLAN port, 1.5KV network isolation transformer protection					
Power Supply	DC9-36V, over-current protection, anti-reverse connection, 2 PIN industrial terminal					
IO. (Optional)	Support 4*IO (DO or IO can be configured)					
Serial port (*Optional)	1*RS232 + 1*RS485					
*Alternatives for I/O or Serial port						
Reset	Pinho	ole reset button				
SIM Card	Draw	er-type slot*1, sup	port dual-NANO S	IM		
Wi-Fi (Optional)	IEEE 802.11b/g/n, 300Mbps					
GNSS (Optional)		Support GPS/ GLONASS /BeiDou /Galileo/ QZSS Positioning accuracy is 2.5 meter				
Antenna Connector	4G: SMA x 1; Wi-Fi: RP-SMA x 2; GPS(Optional): SMA x 1 Note" North America models: 2 x SMA 4G antenna connectors GPS models: 1 x RP-SMA Wi-Fi antenna connector, 1 x SMA GPS antenna connector					
Ground Terminal	Supp	orts				
Mechanical Specs						
Dimensions	120x	99x25mm	Weight	354g		
Installation	Pane	el mounting, rail Inting	Protection Ratin			
Housing	Meta	al	Cooling	Fanless		
Power rate						
Standby power	120m	A-200mA@12V				
Working power		150mA-320mA@12V				
Peak power		nA@12V				
Wi-Fi Transmit Power						
	802.11b:16dBm+/-2dBm(l1Mbps) 802.11g:16dBm+/-2dBm(54Mbps) 802.11n@2.4GHz:16dBm+/-2dBm(HT20MCS7) 802.11n@2.4GHz:16dBm+/-2dBm(HT40MCS7)					
Transmit Power	802.	IIII@2.+0112.10dB1				
Transmit Power Ambient Environme		TTT@2.+0112.104B1				
	ent	~ 85°C	Operating Temperature	-20~ 70°C		
Ambient Environme Storage	-40 ·		Temperature	-20~ 70°C		
Ambient Environme Storage Temperature	-40 ·	~ 85°C	Temperature	-20~70°C		
Ambient Environme Storage Temperature Ambient Humidity	-40 ^ 5~95	~ 85°C	Temperature	-20~ 70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator	-40 ^ 5~95	~ 85°C 5% (no condensing	Temperature	-20~ 70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED	-40 ^ 5~95	- 85℃ % (no condensing er, Status, Cellular	Temperature	-20~70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC	-40 - 5~95	- 85°C % (no condensing er, Status, Cellular EN61000-4-2, lev	Temperature a) Wi-Fi	-20~ 70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Fie	-40 ^ 5~95 Powe	~ 85°C % (no condensing er, Status, Cellular EN61000-4-2, lev EN61000-4-3, lev	Temperature 3) Wi-Fi el 3	-20~ 70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Fiel	-40 ^ 5~95 Powe	- 85°C 6% (no condensing er, Status, Cellular EN61000-4-2, lev EN61000-4-3, lev EN61000-4-4, lev	Temperature 3) Wi-Fi el 3 el 3	-20~70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge	-40 ^ 5~95 Powe	~ 85°C % (no condensing er, Status, Cellular EN61000-4-2, lev EN61000-4-3, lev	Temperature 3) Wi-Fi el 3 el 3	-20~ 70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbal	-40 · -40 · Powe	= 85°C 5% (no condensing er, Status, Cellular EN61000-4-2, lev EN61000-4-3, lev EN61000-4-5, lev EN61000-4-6, lev	Temperature a) Wi-Fi el 3 el 3 el 3	-20~ 70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbal	-40 · -40 · Powe	- 85°C % (no condensing er, Status, Cellular, EN61000-4-2, lev EN61000-4-3, lev EN61000-4-5, lev	Temperature a) Wi-Fi el 3 el 3 el 3	-20~70°C		
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbal	-40 · -40 · Powe	= 85°C 5% (no condensing er, Status, Cellular, EN61000-4-2, lev EN61000-4-3, lev EN61000-4-6, lev EN61000-4-6, lev EN61000-4-12, lev	Temperature a) Wi-Fi el 3 el 3 el 3			
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbal Immunity Shock Wave Resistar Power Frequency Magnetic Field	-40 · -40 · Powe	= 85°C 5% (no condensing er, Status, Cellular, EN61000-4-2, lev EN61000-4-3, lev EN61000-4-6, lev EN61000-4-6, lev EN61000-4-12, lev	Temperature a) Wi-Fi el 3 el 3 el 3 el 3			
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbal Immunity Shock Wave Resistar Power Frequency Magnetic Field Resistance	-40 ^ 5~95 Powee	= 85°C 5% (no condensing er, Status, Cellular, EN61000-4-2, lev EN61000-4-3, lev EN61000-4-6, lev EN61000-4-6, lev EN61000-4-12, lev	Temperature 3) Wi-Fi el 3 el 3 el 3 rizontal/vertical 4			
Ambient Environme Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbal Immunity Shock Wave Resistan Power Frequency Magnetic Field Resistance Physical Specs	Power Power IECE	- 85°C 5% (no condensing er, Status, Cellular, EN61000-4-2, lev EN61000-4-3, lev EN61000-4-6, lev EN61000-4-12, lev EN61000-4-12, lev EN61000-4-12, lev EN61000-4-8, ho	Temperature a) Wi-Fi el 3 el 3 rel 3 rel 3 rizontal / vertical 4	400A/m (>level 2)		

InRouter305 Softwar	e Specifications
Network Connection	
Network Access	APN, VPDN
Access Authentication	СНАР/РАР
Network Type	GSM/GPRS/EDGE, UMTS/HSPA+/EVDO/TD-SCDMA/, TDD LTE/FDD LTE (Please refer to the Ordering Guide for frequencies)
LAN protocol	ARP, Ethernet
WAN protocol	Static IP, DHCP, PPPoE
Network Protocol	
IP Application	IPv4, Ping, Trace, DHCP Server, DHCP Relay, DHCP Client, DNS relay, DDNS, Telnet, IP Passthrough
IP Routing	Static routing, OSPF dynamic routing
NAT	Supports network address translation
Security	
Network Security	Stateful Packet Inspection (SPI), DoS attack defense; Multicast filter/Ping probe packet, Access Control List (ACL); Content URL filter, port mapping, virtual IP mapping, IP-MAC binding
Data Security	Supports PPTP, L2TP, GRE, IPSEC VPN (IKEv1, IKEv2), OPENVPN , DMVPN , WireGuard , ZeroTier Supports CA digital certificate
Reliability	
Hot Backup	VRRP hot backup
Link Detection	Sends heartbeat packets to detect, auto redials when disconnected
Dual SIM Failover	Supports dual SIM failover
Embedded Watchdog	Device runs self-detection, auto recovers from malfunctions
WLAN (Optional)	
Protocol	IEEE 802.11b/g/n
Rate	Up to 300Mbps
Security	Open system, shared key, WPA/WPA2 certification WEP/TKIP/AES encryption
Transmission Distance	80 meters by line of sight (Actual transmission distance depends on environment of the site.)
Intelligence	
Integrated DTU Functions	TCP, UDP transparent transmission mode, TCP Server mode Supports conversion of Modbus RTU to Modbus TCP bridge Supports DCUDP, DCTCP mode
Network Managemen	nt
QoS Management	Bandwidth limit, IP speed limit
Configuration	Telnet, web, ssh and console
Update	Web, Device Manager
Log	Local system log, remote log, and serial export of log. Power down saving of important logs.
SMS Functions	Status query, restart
Dial-on-demand	Dial-on-demand, data / SMS activation
Network management	Supports InHand Device Manager, batch management Add the user experience plan to access The InHand Networks cloud platform to enjoy efficient and convenient services
SNMP	SNMP v1/v2c/v3,supports SNMP TRAP
Traffic Management	Supports data traffic threshold, traffic statistics and traffic alarm
Alarm	System restart alarm, LAN port online/offline alarm, data traffic alarm, SIM card failure alarm ,etc.
Maintenance Tools	Ping, route tracking, network speed test
Status Query	System status, modem status, network connection status, and routing status



Ordering Guide

Model code: IR305- <wmnn>-<wlan na="">-<s na="">-</s></wlan></wmnn>						
Model	<wmnn>: Cellular Type & Module</wmnn>	<wlan na="">: Wi-Fi</wlan>	<s na="">: Serial/IO</s>	<g na="">: GNSS</g>		
IR305-NRQ2- <wlan na="">-<s na=""></s></wlan>	(For China 5G) 5G NR NSA: n41/n78/n79 5G NR SA: n1/n28*/n41/n77/n78/n79 LTE-FDD: B1/B3/B5/B8 LTE-TDD: B34/B38/B39/B40/B41 WCDMA: B1/B5/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>			
IR305-LQ20- <wlan na="">-<s na=""></s></wlan>	(For China CAT4) FDD: B1/B3/B5/B8 TDD: B34/B38/B39/B40/B41 WADMA: B1/B5/B8 GSM: B3/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>			
IR305-FQ58-< WLAN /NA>- <s na="">-<g na=""></g></s>	(For Europe & APAC, CAT 4) FDD: B1/B3/B7/B8/B20/B28A TDD: B38/B40/B41 WADMA: B1/ B8 GSM: B3/ B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S; 1*RS232+1*RS485 <na>: 4*IO</na>	G: GNSS <na>: no GNSS</na>		
IR305-FQ53-< WLAN /NA>-<\$/NA>	(For Europe & APAC, CAT 1) FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>			
IR305-FQ39- <wlan na="">-<s na="">-<g na=""></g></s></wlan>	(For North America, AT&T, VzW, T-Mobile, LTE CAT 6) FDD: B2/B4/B5/B7/B12/B13/B25/B26/B29/B30/B66 WCDMA: B2/B4/B5	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>	G: GNSS <na>: no GNSS</na>		
IR305-FF38- <wlan na="">-<s na="">-<g na=""></g></s></wlan>	(For North America, AT&T, VzW, LTE CAT4) FDD: B2/B4/B5/B12/B13/B17/B66/B71 WCDMA: B2/B4/B5	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>	G: GNSS <na>: no GNSS</na>		
IR305-FQ33- <wlan na="">-<s na=""></s></wlan>	(For North America, AT&T, VzW, LTE CATI) FDD: B2/ B4/ B5/ B12/B13/ B25/ B26 WCDMA: B2/B4/B5	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>			
IR305-FQ78- <wlan na="">-<s na=""></s></wlan>	(For Australia, Latin America) FDD: B1/B2/B3/B4/B5/B7/B8/B28 TDD: B40 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>			
IR305-EN00- <wlan na="">-<s na=""></s></wlan>	NA	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>			

Example: IR305-LQ20-WLAN: Five Ethernet ports IR305 series cellular router, support IPSec / PPTP / L2TP / OPEN VPN.

Note: Users are asked to join InHand User Experience Plan at first time login. If user agreed to join, the router will connect to InHand DeviceManager portal. If users want to disable it, please go to Services->User Experience Plan to change the setting.



InHand Remote Operation and Maintenance Solution

InConnect is a simple "plug & play" service that builds secure remote networks for your machines (IPCs, IP cameras, PLCs, HMIs, RTUs, controllers, etc.). Engineers can use InConnect to realize remote maintenance, program downloads, and log diagnostics. InConnect helps enterprises quickly connect to globally distributed business locations, empowering enterprises in their IT infrastructure and digital transformation initiatives.



InConnect Service

- Centralized management
- · Efficient zero touch deployment
- Simplified network configuration
- Multi-dimensional security



4G Industrial Router

- Multilink Backup & Dual SIM failover
- VPN networking
- Serial Port, I/O
- EMC Level 2
- IP30, -20~70°C, DC 9~36V

About Us

InHand Networks is a leading IoT solutions provider founded in 2001, dedicated to driving digital transformation across industries and empowering customers to unlock their full potential and achieve accelerated growth.

We specialize in delivering industrial-grade connectivity solutions for diverse sectors, such as enterprise networks, industrial and building IoT, digital energy, smart commerce, and mobility. Our comprehensive product portfolio and services cater to various applications worldwide, including smart manufacturing, smart grid, intelligent transportation, smart retail, etc. With a global footprint spanning over 60 countries, we serve customers in China, the United States, France, Germany, the United Kingdom, Italy, and beyond.



43671 Trade Center Place, Suite 100, Dulles, VA 20166, USA T: +1 (703) 348-2988 E: info@inhand.com www.inhand.com