


D 3510-TK

CE
35x35x10mm(1.38"x1.38"x0.39")

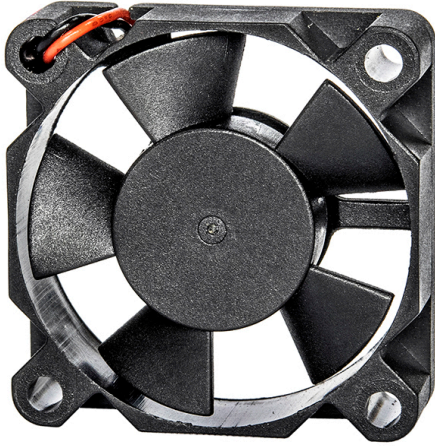


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-30°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	9g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

35 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D3510V12XL-TK	12	0.042	0.50	7000	0.11	2.84	3.91	0.11	28.0
D3510V12L-TK	12	0.050	0.60	8000	0.14	3.51	4.50	0.13	31.0
D3510V12M-TK	12	0.054	0.65	9000	0.17	4.31	5.00	0.14	34.4
D3510V12H-TK	12	0.058	0.70	10000	0.20	5.12	5.32	0.15	37.1
D3510V12SL-TK	12	0.067	0.80	11000	0.24	6.11	6.06	0.17	39.4
D3510V12SM-TK	12	0.075	0.90	12000	0.27	6.77	6.39	0.18	41.0
D3510V12SH-TK	12	0.083	1.00	13000	0.31	7.97	6.87	0.19	42.6
D3510V12SSH-TK	12	0.092	1.10	14000	0.34	8.74	7.41	0.21	44.7
D3510V5XL-TK	5	0.10	0.50	7000	0.11	2.84	3.91	0.11	28.0
D3510V5L-TK	5	0.12	0.60	8000	0.14	3.51	4.50	0.13	31.0
D3510V5M-TK	5	0.13	0.65	9000	0.17	4.31	5.00	0.14	34.4
D3510V5H-TK	5	0.14	0.70	10000	0.20	5.12	5.32	0.15	37.1
D3510V5SL-TK	5	0.16	0.80	11000	0.24	6.11	6.06	0.17	39.4
D3510V5SM-TK	5	0.18	0.90	12000	0.27	6.77	6.39	0.18	41.0
D3510V5SH-TK	5	0.20	1.00	13000	0.31	7.97	6.87	0.19	42.6
D3510V5SSH-TK	5	0.22	1.10	14000	0.34	8.74	7.41	0.21	44.7

DIMENSION

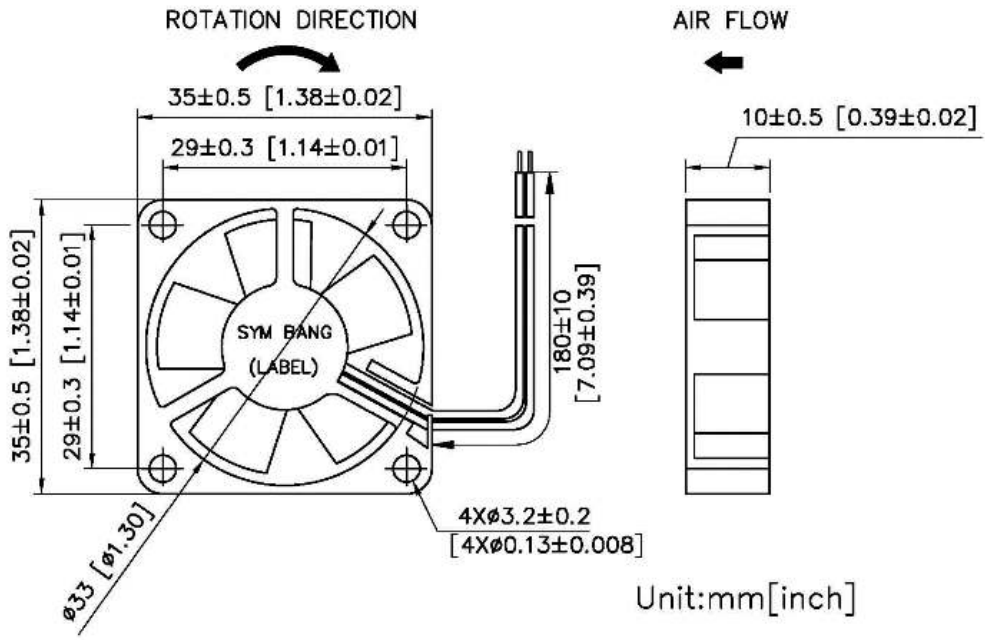

AIR PERFORMANCE

