


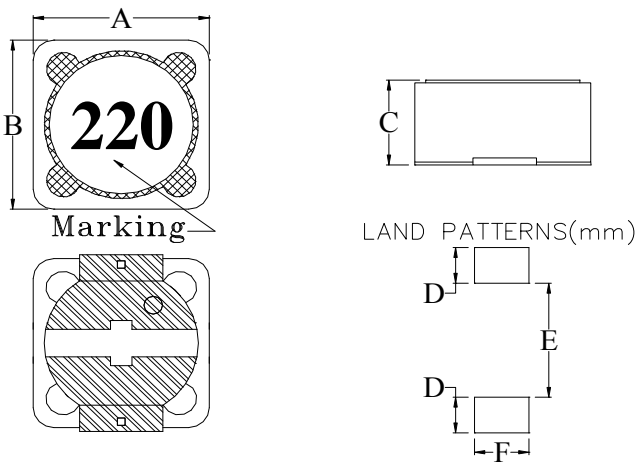

# SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060721042
ITEM	JPRH 1207-220M <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：D	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	12.5	Max.
	B	12.5	Max.
	C	8.0	Max.
	D	2.9	REF.
	E	7.0	REF.
	F	5.4	REF.
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.
INDUCTANCE	$22 \pm 20\%$ $\mu\text{H}$
TEST FREQUENCY	1 KHz
TEST VOLT	0.25 V
RDC	36.4 (max) $\text{m}\Omega$
Isat	4.7 (max) A
Irms	4.7 (max) A
	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Meter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.

**REMARK :**

1. Inductance drop = 25% typ at Isat.
2.  $\Delta T = 40^\circ\text{C}$  rise typ at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

# SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060721042
ITEM	JPRH 1207-220M <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：D	表單編號：QRRD-01-02

**(3) Material List**

NO	ITEM	MATERIAL	NOTE
1	CORE	DR 9.9*7.1& RI 12.1*7.0*10.65 Or other's equivalent	
2	BASE	C1100	
3	WIRE	SFBW Or other's equivalent	155°C CLASS
4	SOLDER	100H Or other's equivalent	
5	EPOXY	6020H-6-9(NH) / S-9001A-6B Or other's equivalent	
6	INK	SMD-48A Or other's equivalent	Black
7	TAPE	MYLAR TAPE	Yellow

REMARK :

PURCHASER CONFIRMED :

	APPROVED	CHECKED	DRAWN
			



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw