



VERSION	CHANGE CONTENT	DATE
V00	first issue	2005-11-21

TYPE	A	B
LED B/L	13.4	9.3

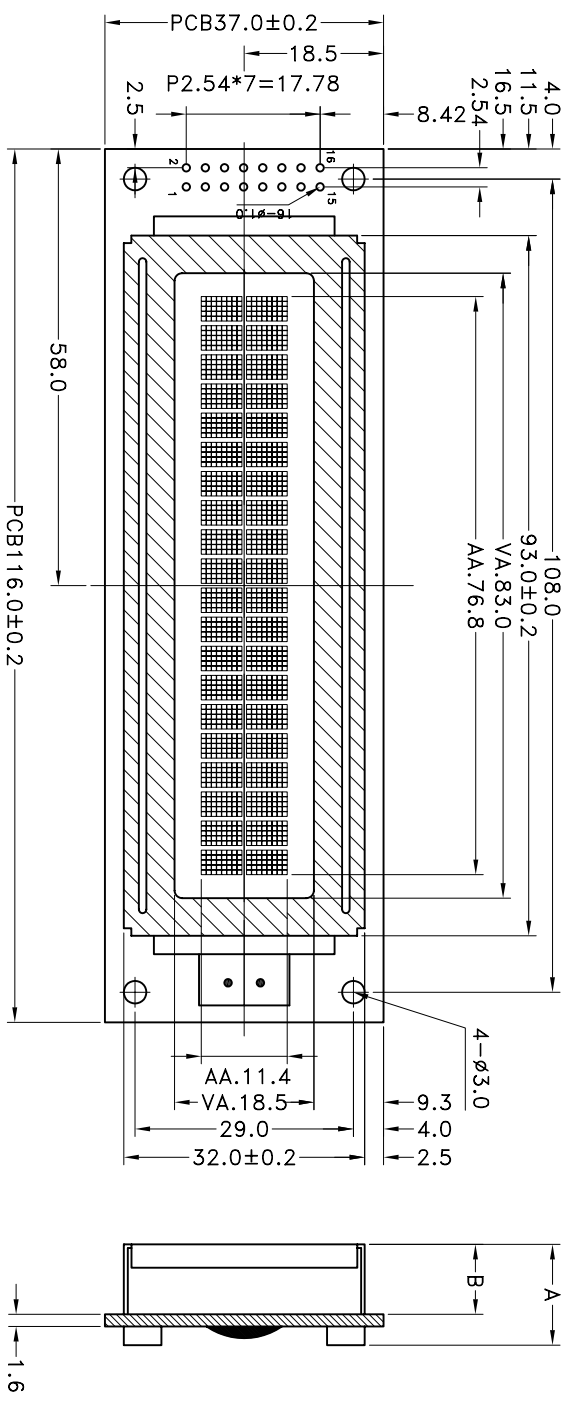

DOTS SCALE 3 : 1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

1. DISPLAY TYPE : STN/TRANSMISSIVE/NEGATIVE/BLUE
  2. LCD DRIVING VOLTAGE :4.7V
  3. LOGIC VOLTAGE :5.0V
  4. VIEWING DIRECTION : 6 0'CLOCK.
  5. OPERATING TEMP : 0°C~50°C.
  6. STORAGE TEMP : -10°C~60°C
  7. DRIVE MODE : 1/16 DUTY,1/5 BIAS
  8. BACKLIGHT :WHITE/SIDE/BACKLIGHT/5.0V
  9. DRIVE IC : SPLCT80D
- MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

DESCRIPTION: C/D

SCALE	FIT	TINSHARP
SHEET	1 OF 1	ELECTRONICS CO., LTD.
TOLERANCE	±0.2mm	

APP	PROJECTION	TC2002A-03
CHK		
DWN		

TEL: (020) 82346361 FAX: (020) 82346155