


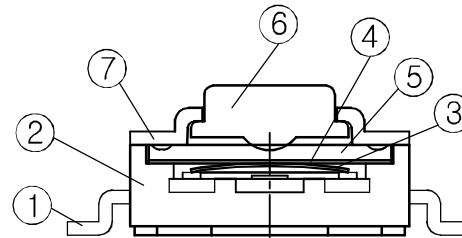



CIRCUIT DIAGRAM



PCB DIMENSION

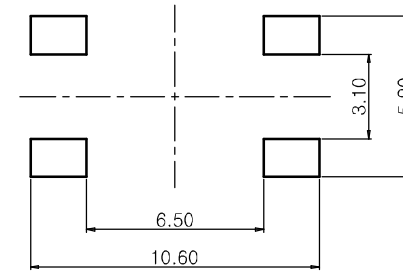


NOTE

1. OPERATING FORCE : 200±50gf
2. RATING : DC 12V 50mA
3. TRAVEL : 0.30±0.1 mm
4. CONTACT RESISTANCE : 100mΩ MAX
5. OPERATING LIFE : 350,000cycles MAX
6. GENERAL TOLERANCE : ±0.3
7. L : 3.1mm

NOTE

1. Omission Dimensions To CAD Data File Reference.

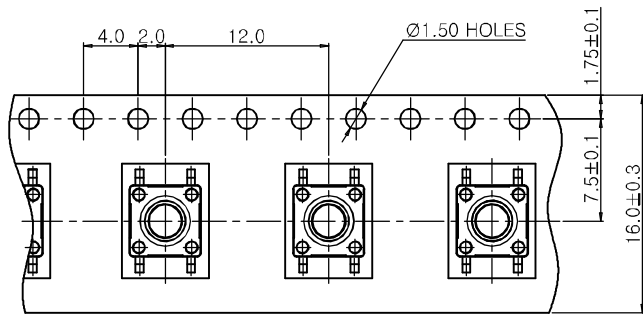

7	COVER	SUS301-H 0.30t	NT	1	
6	STEM	9t	BK	1	
5	RUBBER	SILICONE	NT	1	
4	DUST COVER	PA	NT	1	
3	CONTACT	SUS301CSP-H	Ag<CLAD>	1	
2	CASE	9t	BK	1	
1	TERMINAL	C2680R-EH 0.30t	Ag	1	
No.	DESCRIPTIONS	MATERIAL	FINISH/COLOR	Q'TY	REMARK
△		TRIGON- OMETRY	UNIT	SCALE	WATER PROOF(IP67) MODEL INT-1134S31AP
△		APPD	CHKD	DSGD	
△		k s h	p y w	yong woon. park	
△					
△					
NO	07.09.06	CORRECTION	2016.08.05	2016.08.04	2016.08.03