

SPECIFICATION FOR APPROVAL

Customer : **PHP MARITEX**

Description : **FERRITE BEADS**

Part No. : **RP 57.6x6.5x12**

ISSUE Date : **2005/8/9**

SQ No. : **9408013**

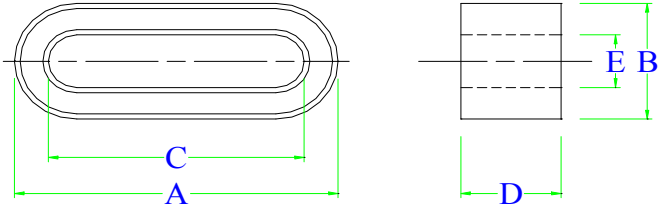
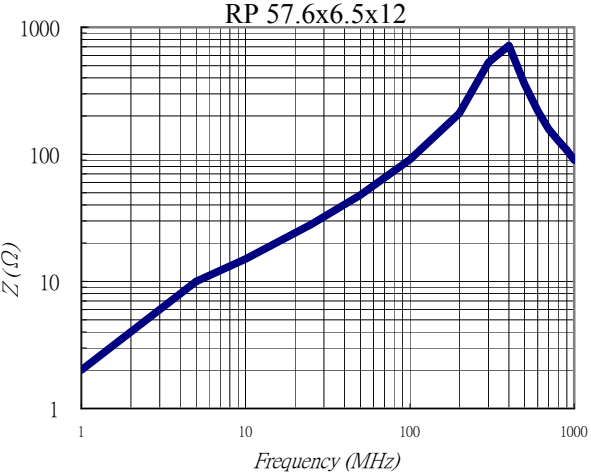


Customer's P/N :

CUSTOMER APPROVAL

確認無誤後請回簽一份.謝謝

PLEASE RETURN AFTER APPROVING

SPECIFICATION FOR APPROVAL

CUSTOMER : PHP MARITEX			DATE : 2005年8月9日							
VENDOR'S P/N : RP 57.6x6.5x12			CUSTOMER'S P/N : 9406022.9408013							
DIMENSION : (m/m) 			A	57.60	± 1.20 m/m					
			B	6.50	± 0.50 m/m					
			C	52.00	± 1.00 m/m					
			D	12.00	± 0.50 m/m					
			E	1.40	± 0.40 m/m					
SPECIFICATION			TEST REPORT							
Z at 25 MHZ	22 (Min) Ω	Meas. Item	Impedance (Ω)		Dimension(mm)					
Z at 100MHZ	70 (Min) Ω		25MHz	100MHz	A	B	C			
		1	29.09	94.29	57.50	6.57	51.98			
		2	29.06	94.00	57.48	6.60	51.79			
			3	29.30	94.89	57.52	6.60	51.80		
			4	29.21	95.15	57.43	6.67	51.78		
			5	28.70	92.76	57.47	6.71	52.07		
			6	29.67	94.35	57.53	6.76	51.84		
			7	29.48	94.16	57.46	6.68	52.01		
			8	29.08	93.58	57.52	6.72	52.34		
			9	29.34	94.56	57.49	6.74	52.08		
			10	29.15	94.47	57.58	6.66	52.08		
					X̄	29.21	94.22	57.50	6.67	51.98
					R	0.97	2.39	0.15	0.19	0.56
TEST INSTRUMENT:			<input checked="" type="checkbox"/> HP 4294A <input checked="" type="checkbox"/> HP 4286A <input type="checkbox"/> HP 4291B <input type="checkbox"/> HP 4285A <input type="checkbox"/> ZENTECH 3302 <input type="checkbox"/> ZENTECH 1320							
REMARK:			Wire: 線徑2UEW 0.65 φ * 100mm 0.5TS							
			PURCHASER CONFIRMED							
Approved by		Checked by		drawn by	